

# Distributed Calibration of Time Domain UWB Ranging Radios

PulsON<sup>®</sup> 300 and 400 Series

## **TIME DOMAIN<sup>®</sup>**

Cummings Research Park  
4955 Corporate Drive Suite 101  
Huntsville, AL 35805 USA

<http://www.timedomain.com>

Tel: +1 256.922.9229

+1 888.826.8378

Fax: +1.256.922.0387

320-0327B  
June 2016



## **Copyright**

All rights reserved. Time Domain® 2001-2016. All rights reserved.

## **Trademarks**

Time Domain®, PulsON®, and “PulsON Triangle” logo are registered trademarks of Time Domain. Ethernet® is a registered trademark of Xerox Corporation. Microsoft® and Windows XP®, Windows Vista®, Windows 7®, Windows 8® and Windows 10® are registered trademarks of Microsoft Corporation. MATLAB® is a registered trademark of MathWorks, Inc. Any trademarks, trade names, service marks or service names owned or registered by any other company and used in this manual are the property of its respective company.

## **Rights**

Rights to use this documentation are set forth in the PulsON Products Terms and Conditions of Sale.

*This paper discusses a method of measurement of the intrinsic Time of Flight (TOF) delay between antenna and internal timing electronics of a UWB ranging radio. This technique uses many (at least 3) radios and isolates the bias in each through a system of equations.*

## Introduction

Time Domain radios estimate distance through measurement of the bidirectional Time of Flight (TOF) between requesting and responding devices. In order to adjust for the TOF delay between antenna and radio electronics each radio is pre-programmed with an internal delay estimate representing the delay between the radio's internal timer/sampler and the face of the antenna. The resulting range calculation is adjusted by the "Electrical Delays" of both requester and responder.

With only two radios the bias errors may be applied to one or averaged across both. However when a system of radios is used this technique allows estimation of individual errors in each radio.

This paper describes a method of estimating the unique electrical delay biases of each radio in a group of  $n$  radios by solving a system of  $n(n-1)$  linear equations, one equation for each measured link, or "edge", where the antenna center forms the "vertices" of a 3D polygon. The error estimates are solved through a straightforward application of linear algebra.

## Approach

Each range measurement in a system of radios is modeled as a combination of the true distance, with the addition of two error factors. Thus for each link between radio  $i$  to radio  $j$  in a system of  $n$  radios

$$r_{i,j} = d_{i,j} + \epsilon_i + \epsilon_j, \quad \{1 \leq i, j \leq n, i \neq j\} \quad (1)$$

where:

$r_{i,j}$  is the UWB-estimated range between antennas of nodes  $i$  and  $j$ ,

$d_{i,j}$  is the true range between antennas of nodes  $i$  and  $j$ , &

$\epsilon_i$  &  $\epsilon_j$  are the internal electrical delay biases of nodes  $i$  and  $j$ .

The goal is determination of  $\epsilon_i$  and  $\epsilon_j$  given known (manually measured)  $d_{i,j}$  and a collection of (radio-measured) range measurements  $r_{i,j}$ . This set of equations is converted to matrix form and solved for the error vector  $E$

$$E = X^{-1}[R - D] \quad (2)$$

where:

$E = [\epsilon_1 \ \epsilon_2 \ \dots \ \epsilon_n]^T$  is the column vector of  $n$  bias errors in each radio 1 to  $n$ ,

$R = [r_{1,2} \ r_{1,3} \ \dots \ r_{n,n-1}]^T$  is the column vector of  $l=n(n-1)$  radio link measurements,

$D = [d_{1,2} \ d_{1,3} \ \dots \ d_{n,n-1}]^T$  is the column vector of  $l=n(n-1)$  manual measurements, and

$X^{-1}$  is the  $l \times n$  (#links by #nodes) "design" matrix mapping the nodes to the links.

Note with  $n > 3$  the number of links,  $l$ , may exceed the number of nodes,  $n$ . In general, the more radios and more links used will produce more accurate results, spreading any residual statistical error across the entire system.

## Three Node Example

The simplest system contains of only three radios with three links. The basis equations for simultaneous solution are

$$\begin{aligned} r_{1,2} &= d_{1,2} + \epsilon_1 + \epsilon_2 \\ r_{1,3} &= d_{1,3} + \epsilon_1 + \epsilon_3 \\ r_{2,3} &= d_{2,3} + \epsilon_2 + \epsilon_3 \end{aligned} \quad (3)$$

Conversion to matrix form reveals the design matrix  $X$

$$\begin{bmatrix} r_{1,2} \\ r_{1,3} \\ r_{2,3} \end{bmatrix} = \begin{bmatrix} d_{1,2} \\ d_{1,3} \\ d_{2,3} \end{bmatrix} + \begin{bmatrix} 1 & 1 & 0 \\ 1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix} \begin{bmatrix} \epsilon_1 \\ \epsilon_2 \\ \epsilon_3 \end{bmatrix} \quad (4)$$

In matrix notation

$$R = D + XE \quad (5)$$

Solving for the error vector  $E$

$$E = X^{-1}(R - D) \quad (6)$$

Note in the 3-node case  $X$  is square and can be inverted directly as in equation 6. However if the number of links is greater than the number of radios (as is the case when  $n > 3$ ) one may use the left-pseudo inverse  $X^{-1} = (X^T X)^{-1} X$ . Thus, the general solution is

$$E = (X^T X)^{-1} X(R - D) \quad (7)$$

Computing  $X^{-1}$  and expanding the system of equations reveals the working system of equations

$$\begin{bmatrix} \epsilon_1 \\ \epsilon_2 \\ \epsilon_3 \end{bmatrix} = \begin{bmatrix} .5 & .5 & -.5 \\ .5 & -.5 & .5 \\ -.5 & .5 & .5 \end{bmatrix} \left( \begin{bmatrix} r_{1,2} \\ r_{1,3} \\ r_{2,3} \end{bmatrix} - \begin{bmatrix} d_{1,2} \\ d_{1,3} \\ d_{2,3} \end{bmatrix} \right) \quad (8)$$

Thus the biases for radios 1, 2, and 3 are  $\epsilon_1$ ,  $\epsilon_2$ , and  $\epsilon_3$ , respectively, based on manually measured link distances  $d_{1,2}$ ,  $d_{1,3}$ , and  $d_{2,3}$ , and radio range measurements  $r_{1,2}$ ,  $r_{1,3}$ , and  $r_{2,3}$ .

In practice, once the system is set up and  $D$  is manually surveyed,  $R$  is iteratively measured many (hundreds of) times. The ranges  $R$  are post-processed and any outliers removed. The means of  $E$  components form the calculated electrical delays of each radio. These can be used to calibrate each radio, or optionally in a host-based bias table. The standard deviations of  $E$  include a combination of ranging error as well as any error from the manual survey. When surveyed well, these standard deviations will be of the same order of magnitude as that of the underlying link ranges.

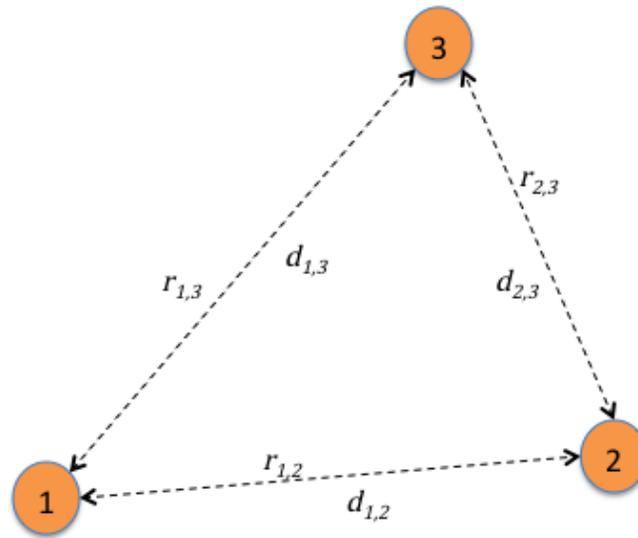


Fig. 1: A system of 3 nodes and 3 links. Manual link measurements are denoted  $d_{i,j}$ , and radio link measurements  $r_{i,j}$